


# MIQ-04

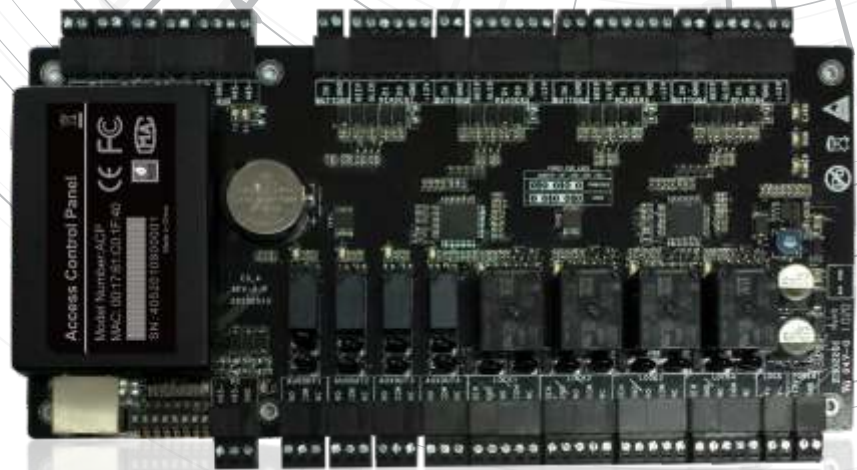

## 4-Door Access Control IP-Based Control Panel

MIQ-04 is built on flexible, open technology to provide management, real-time monitoring, and control of your access control system—all from a browser, with no additional software to install. Our secure Web-hosted infrastructure and centralized online administration reduce your IT costs and allow you to easily manage all of your access points in a single location. MIQ-04 versatile design features take care of present and future needs with ease and efficiency. It is one of the most rugged and reliable controllers on the market, with a multitude of built-in features. MIQ-04 can communicate at 38.4 Kbps via RS-485 configuration or Ethernet TCP/IP networks. It can store up to 30,000 cardholders. SDK (Software Development Kit) is available for the customer to integrate the controller into existing access control software or to develop new software.

## MIQ-04 Specifications

<b>Platform</b>	<b>CPU</b>	32bit MIPS CPU
<b>CONNECTIVITY</b>	<b>Output Ports</b>	8 (4-Form C Relay for Lock, 4-Form C Relay for Aux)
	<b>Input Ports</b>	12 (4-Exit Button, 4-Door Status, 4-AUX)
	<b>GPRS</b>	Rs485
<b>NETWORK</b>	<b>Technology</b>	TCP/IP
<b>MEMORY</b>	<b>Internal</b>	256MB
	<b>RAM</b>	32MB
<b>SOUND</b>	<b>Internal</b>	Buzzer
<b>POWER</b>	<b>Power Supply</b>	12V DC, 1.5A
<b>BODY</b>	<b>Dimensions</b>	Board Only : 218(W)×106(H) mm Enclosure : 345(W)×275(H)×70(D) mm
<b>MISC</b>	<b>Regulatory and certificates</b>	CE, FCC, RoHS
<b>Operational Environment</b>	<b>Working Temperature</b>	0°C ~ +45°C
	<b>Relative Humidity</b>	20% ~ 80% relative humidity non-condensing
<b>Biometric data storage capacity</b>	<b>Record capacity</b>	1,00,000
	<b>User</b>	30,000 Card users
<b>Function</b>	<b>Number of Readers Supported</b>	4 nos. (26-bit Wiegand, 8-bit for PIN)
	<b>LED Indicator</b>	Yes, LED indication for communication, power, status and punch card